

Dune eVo Max



Dune eVo Max with its microperforated, finely sanded surface, offers improved levels of sound absorption and sound attenuation, making it a great choice for classrooms and other areas requiring Class C sound absorption.


KEY FEATURES

- Improved aesthetics with discreet perforations, a smoother finish and a class-leading, fully painted whiteness
- Fully painted, reinforced edges for a more robust tile and greater durability
- Easy to handle and re-engineered for a better, easier fit

- Balanced acoustical absorption performance of $0.65 \alpha_w$ and sound attenuation of 35 dB
- First tile and grid system to gain C2C certification
- 30 year system warranty

APPLICATION AREAS

Ideal for classroom and general teaching conditions.

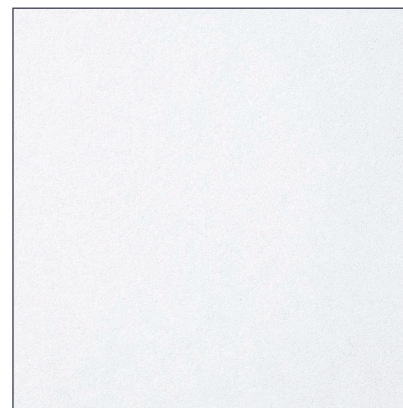

EDGE DETAIL	BOARD		TEGULAR		MICROLOOK 90																																										
THICKNESS (MM)	18		18		18																																										
MODULES (MM)	600 x 600 5471M 1200 x 600 5472M		600 x 600 5473M		600 x 600 5475M																																										
SUSPENSION SYSTEMS	Prelude 24 XL ² / TLS Prelude 24 Sixty ² XL ² / TLS		Prelude 24 XL ² / TLS Prelude 24 Sixty ² XL ² / TLS		Prelude 15 TL / XL ² Interlude HRC XL ² Silhouette XL ²																																										
COLOURS	 Global White																																														
SUSTAINABILITY	 46 A E1																																														
ACOUSTICS	 EN ISO 354 & EN ISO 11654  EN ISO 10848-2 & EN ISO 717-1  EN ISO 140-3 & EN ISO 717-1 <table><tr><th colspan="12">Hz α_p</th></tr><tr><th></th><th>α_w</th><th>D_{nfw}</th><th>R_w</th><th>Class</th><th>NRC</th><th>125</th><th>250</th><th>500</th><th>1000</th><th>2000</th><th>4000</th></tr><tr><td>Board, Tegular, MicroLook 90</td><td>0.65</td><td>35 dB</td><td>17 dB</td><td>C</td><td>0.60</td><td>0.35</td><td>0.45</td><td>0.60</td><td>0.65</td><td>0.70</td><td>0.65</td></tr></table>											Hz α_p													α_w	D_{nfw}	R_w	Class	NRC	125	250	500	1000	2000	4000	Board, Tegular, MicroLook 90	0.65	35 dB	17 dB	C	0.60	0.35	0.45	0.60	0.65	0.70	0.65
Hz α_p																																															
	α_w	D_{nfw}	R_w	Class	NRC	125	250	500	1000	2000	4000																																				
Board, Tegular, MicroLook 90	0.65	35 dB	17 dB	C	0.60	0.35	0.45	0.60	0.65	0.70	0.65																																				
FIRE REACTION	 EEA Euroclass A2-s1, d0 EN 13501-1																																														
OTHER PERFORMANCES & FEATURES	 85%  99% RH   30 YEAR SYSTEM GUARANTEE  BIM READY  $\lambda = 0.060$ W/m K EN 12667 & ISO 8301  4.3 kg/m²   LIFETIME GUARANTEE																																														
CUSTOM OPTIONS	 Dimensions																																														