

Dune eVo



In every sector from transport to retail, and in every environment from hotels and hospitals to schools and workplaces, Dune eVo is designed to meet all your project needs. Dune eVo is 100% recyclable for never ending value and Cradle to Cradle Certified™ to meet your sustainability targets.

KEY FEATURES

- Improved aesthetics with discreet perforations, a smoother finish and a class-leading, fully painted whiteness
- Fully painted, reinforced edges for a more robust tile and greater durability
- Easy to handle and re-engineered for a better, easier fit
- Enhanced acoustical absorption performance of $0.60 \alpha_w$ for better


acoustic comfort









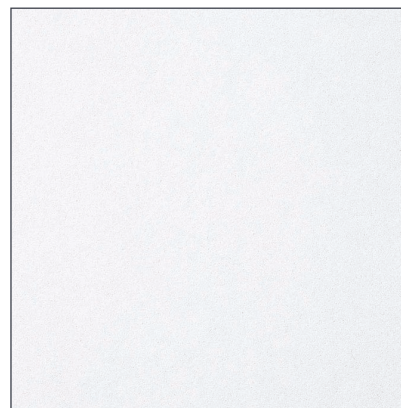










- Mix and match modules for increased flexibility and a more complete project solution
- First tile and grid system to gain C2C certification
- 30 year system warranty

APPLICATION AREAS

Ideal for every space.

Armstrong®
CEILING SOLUTIONS



EDGE DETAIL	BOARD		TEGULAR		MICROLOOK 90																																						
THICKNESS (MM)	15		15		15																																						
MODULES (MM)	600 x 600 5460M 1200 x 600 5461M		600 x 600 5462M 1200 x 600 5463M		600 x 600 5464M 1200 x 600 5465M																																						
SUSPENSION SYSTEMS	Prelude 24 XL ² / TLS Prelude 24 Sixty ² XL ² / TLS		Prelude 24 XL ² / TLS Prelude 24 Sixty ² XL ² / TLS		Prelude 15 TL / XL ² Interlude HRC XL ² Silhouette XL ²																																						
COLOURS	<div> Global White</div>																																										
SUSTAINABILITY	<div><div> BRONZE</div><div> 44</div><div></div><div><div> A</div><div> E1</div></div></div>																																										
ACOUSTICS	<div><div><div> EN ISO 10848-2 & EN ISO 717-1</div><div> EN ISO 354 & EN ISO 11654</div></div><table><tr><th colspan="2"></th><th colspan="9">Hz α_p</th></tr><tr><th></th><th>D_{nfw}</th><th>α_w</th><th>Class</th><th>NRC</th><th>125</th><th>250</th><th>500</th><th>1000</th><th>2000</th><th>4000</th></tr><tr><td>Board, Tegular, MicroLook 90</td><td>34 dB</td><td>0.60</td><td>C</td><td>0.50</td><td>0.40</td><td>0.40</td><td>0.60</td><td>0.55</td><td>0.55</td><td>0.50</td></tr></table></div>												Hz α_p										D _{nfw}	α_w	Class	NRC	125	250	500	1000	2000	4000	Board, Tegular, MicroLook 90	34 dB	0.60	C	0.50	0.40	0.40	0.60	0.55	0.55	0.50
		Hz α_p																																									
	D _{nfw}	α_w	Class	NRC	125	250	500	1000	2000	4000																																	
Board, Tegular, MicroLook 90	34 dB	0.60	C	0.50	0.40	0.40	0.60	0.55	0.55	0.50																																	
FIRE REACTION	<div><div></div><div><div>EEA Euroclass A2-s1, d0</div><div>EN 13501-1</div></div></div>																																										
OTHER PERFORMANCES & FEATURES	<div><div><div> 85%</div><div> 99% RH</div><div></div><div></div><div><div>30 YEAR SYSTEM GUARANTEE</div></div></div><div><div> $\lambda = 0.060$ W/m K EN 12667 & ISO 8301</div><div> 3.6 kg/m²</div><div></div><div></div><div><div>LIFETIME GUARANTEE</div></div></div><div><div>BIM READY</div></div></div>																																										
CUSTOM OPTIONS	<div><div> Dimensions</div><div> Colours¹</div></div> <div>¹ See Colortone range</div>																																										

¹ See Colortone range.