

# Dune eVo dB



The higher attenuation performance of Dune eVo dB offers a perfect solution for improving the privacy between adjacent spaces. Whilst the class-leading whiteness helps to create spaces that are brighter and better, and which offer a greater sense of well-being for your customers.

## KEY FEATURES


- Excellent sound attenuation (39 dB sound reduction) to eliminate the need for sound barriers in close office applications
- Enhanced acoustical absorption performance of 0.60  $\alpha_w$  for better acoustic comfort
- Fully painted, reinforced edges for a












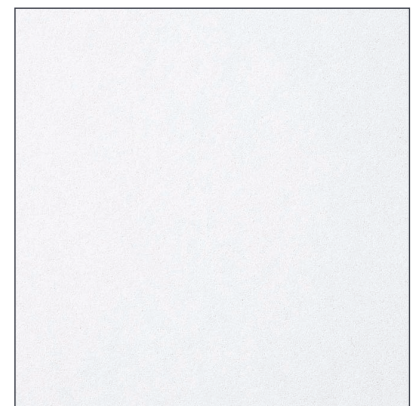









more robust tile and greater durability

- Improved aesthetics with discreet perforations, a smoother finish and a class-leading, fully painted whiteness
- Easy to handle and re-engineered for a better, easier fit

## APPLICATION AREAS

Ideal for individual offices.



EDGE DETAIL	BOARD		TEGULAR		MICROLOOK 90																														
																																			
THICKNESS (MM)	19		19		19																														
MODULES (MM)	600 x 600 ..... 5477M		600 x 600 ..... 5479M		600 x 600 ..... 5481M																														
SUSPENSION SYSTEMS	Prelude 24 XL <sup>2</sup> / TLS Prelude 24 Sixty <sup>2</sup> XL <sup>2</sup> / TLS		Prelude 24 XL <sup>2</sup> / TLS Prelude 24 Sixty <sup>2</sup> XL <sup>2</sup> / TLS		Prelude 15 TL / XL <sup>2</sup> Interlude HRC XL <sup>2</sup> Silhouette XL <sup>2</sup>																														
COLOURS	<div> Global White</div>																																		
SUSTAINABILITY	<div><div> 37</div><div></div><div> A+</div><div> EN 13964 E1</div></div>																																		
ACOUSTICS	<div><div> EN ISO 354 &amp; EN ISO 11654</div><div> EN ISO 10848-2 &amp; EN ISO 717-1</div><div> EN ISO 140-3 &amp; EN ISO 717-1</div></div> <table><tr><th></th><th><math>\alpha_w</math></th><th><math>D_{nfw}</math></th><th><math>R_w</math></th><th>Class</th><th>NRC</th><th>125</th><th>250</th><th>500</th><th>1000</th><th>2000</th><th>4000</th></tr><tr><td>Board, Tegular, MicroLook 90</td><td>0.60</td><td>39 dB</td><td>20 dB</td><td>C</td><td>0.55</td><td>0.35</td><td>0.40</td><td>0.60</td><td>0.65</td><td>0.75</td><td>0.65</td></tr></table>												$\alpha_w$	$D_{nfw}$	$R_w$	Class	NRC	125	250	500	1000	2000	4000	Board, Tegular, MicroLook 90	0.60	39 dB	20 dB	C	0.55	0.35	0.40	0.60	0.65	0.75	0.65
	$\alpha_w$	$D_{nfw}$	$R_w$	Class	NRC	125	250	500	1000	2000	4000																								
Board, Tegular, MicroLook 90	0.60	39 dB	20 dB	C	0.55	0.35	0.40	0.60	0.65	0.75	0.65																								
FIRE REACTION	<div><div> EEA Euroclass A2-s1, d0</div><div>EN 13501-1</div></div>																																		
OTHER PERFORMANCES & FEATURES	<div><div> 85%</div><div> 95% RH</div><div></div><div> 30 YEAR SYSTEM GUARANTEE</div><div> BIM READY</div></div> <div><div> <math>\lambda = 0.067</math> W/m K</div><div> Kg</div><div></div></div>																																		
CUSTOM OPTIONS	<div><div> Dimensions</div></div>																																		