


Rockfon® MediCare® Standard

Datasheet



Rockfon® MediCare® Standard

- Fulfils all standard cleaning and hygienic requirements for use in healthcare environments (compliant with HTM 60)
- Does not contribute to the growth of MRSA and ensures low particle emission (ISO Class 5)
- High sound absorption and highest fire safety (Class A1)
- Standard range of tile dimensions in semi-concealed and visible grid options

Product Description

- Stone wool tile
- Visible side: micro-textured white painted fleece
- Rear side: back fleece
- Painted edges

Application Areas

- Healthcare

Edge detail	Module size (mm)	Weight (kg/m ²)	MS / MS easy access (mm)	Recommended installation System
 A15	600 x 600 x 15	2.0	50 / 100	Rockfon® System T15 A™
	1200 x 600 x 15	2.0	50 / 100	Rockfon® System T15 A™
 A24	600 x 600 x 15	2.0	50 / 100	Rockfon® System T24 A™
	1200 x 600 x 15	2.0	50 / 100	Rockfon® System XL T24 A™
 E15	600 x 600 x 15	2.2	58 / 100	Rockfon® System T15 E™
	1200 x 600 x 15	2.2	58 / 100	Rockfon® System T15 E™
 E24	600 x 600 x 15	2.2	58 / 100	Rockfon® System T24 E™
	1200 x 600 x 15	2.2	58 / 100	Rockfon® System XL T24 E™


MS = Minimum Suspension



Performance



Sound absorption
 α_w : 0.95 (Class A)

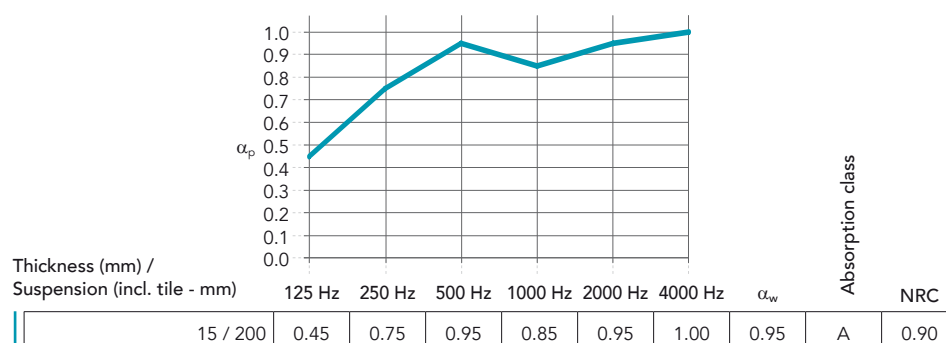

Reaction to fire
 A1



Fire protection
 The fire resistant properties of stone wool ensure Rockfon ceiling tiles provide fire protection in construction. The fire protection properties of Rockfon ceilings have been tested and classified in accordance with European norm EN 13501-2 and/or national norms depending on requirements in national building codes. Some sizes and edge details of Rockfon MediCare Standard can be used with various Chicago Metallic grids and Rockfon systems to create a 30 minutes fire protecting ceiling in accordance with BS 476 Part 21 and Part 23. They can also be used to create a 30 minutes fire protecting membrane ceiling (integrity only) in accordance with BS 476 Part 22.



Light reflection
 86%



Humidity and sag resistance
 Up to 100% RH.
 No visible deflection in high humidity
 C/0N



Cleaning
 - Vacuum
 - Damp cloth



Hygiene
 Stone wool provides no sustenance to microorganisms
 Microbiological class M1 fulfilling the requirements of Zone 4 (very high risk) defined by NF S 90-351:2013.
 Tested with:
 - Methicillin Resistant Staphylococcus Aureus (MRSA)
 - Candida Albicans
 - Aspergillus Brasiliensis



Clean Room
 ISO Class 5



Environment
 Recyclable



Indoor environment
 A selection of Rockfon products have been awarded the Finnish M1 emission classification for building materials and the Danish Indoor Climate Label for low emission products

