



Rockfon® Tropic™

Datasheet



Rockfon® Tropic™

- Smooth attractive white surface for various applications
- Highest Class A sound absorption
- Full range of dimensions in semi-concealed and visible grid options
- Easy to clean with a vacuum

Product Description

- Stone wool tile
- Visible side: smooth white painted fleece
- Rear side: back fleece
- Painted edges

Application Areas

- Office
- Education
- Leisure
- Retail

Edge detail	Module size (mm)	Weight (kg/m ²)	MS / MS easy access (mm)	Recommended installation System
 A15	600 x 600 x 15	2.0	50 / 100	Rockfon® System T15 A™
	1200 x 600 x 15	2.0	50 / 100	Rockfon® System T15 A™
	600 x 600 x 20	2.4	60 / 100	Rockfon® System T15 A™
	1200 x 600 x 20	2.4	60 / 100	Rockfon® System T15 A™
 A24	600 x 600 x 15	2.0	50 / 100	Rockfon® System T24 A™
	1200 x 600 x 15	2.0	50 / 100	Rockfon® System T24 A™
	600 x 600 x 20	2.4	60 / 100	Rockfon® System T24 A™
	1800 x 600 x 20	2.4	60 / 100	Rockfon® System T24 A™
	2400 x 600 x 20	2.4	60 / 100	Rockfon® System T24 A™
	1200 x 1200 x 25	2.5	60 / 100	Rockfon® System T24 A™
 E15	600 x 600 x 15	2.2	58 / 100	Rockfon® System T15 E™
	1200 x 300 x 15	2.2	58 / 100	Rockfon® System T15 E™
	1200 x 600 x 15	2.2	58 / 100	Rockfon® System T15 E™
	600 x 600 x 20	2.8	58 / 100	Rockfon® System T15 E™
		2.8	100 / 100	Rockfon® System Ultraline E™
	1200 x 300 x 20	2.8	100 / 100	Rockfon® System T15 E™
	1200 x 600 x 20	2.8	58 / 100	Rockfon® System T15 E™
		2.8	100 / 100	Rockfon® System Ultraline E™
	1500 x 300 x 20	2.8	100 / 100	Rockfon® System T15 E™
	1800 x 300 x 20	2.8	100 / 100	Rockfon® System T15 E™
 E24	600 x 600 x 15	2.2	58 / 100	Rockfon® System T24 E™
	1200 x 300 x 15	2.2	58 / 100	Rockfon® System T24 E™
	1200 x 600 x 15	2.2	58 / 100	Rockfon® System T24 E™
	600 x 600 x 20	2.8	58 / 100	Rockfon® System T24 E™
	1200 x 300 x 20	2.8	58 / 100	Rockfon® System T24 E™
	1200 x 600 x 20	2.8	58 / 100	Rockfon® System T24 E™
	1500 x 300 x 20	2.8	58 / 100	Rockfon® System T24 E™
	1800 x 300 x 20	2.8	58 / 100	Rockfon® System T24 E™

MS = Minimum Suspension




Performance



Sound absorption

α_w : up to 1.00 (Class A)

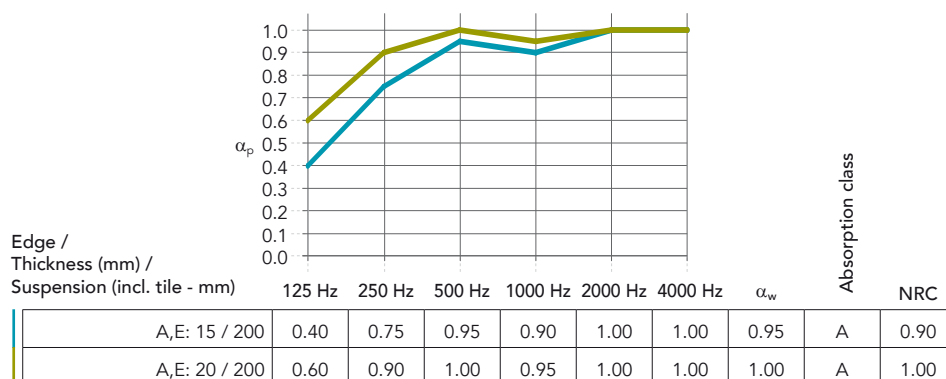

Reaction to fire

A1



Fire protection

Some sizes and edge details of Rockfon Tropic can be used with various Chicago Metallic grids and Rockfon systems to create a 30 and/or 60 minutes fire protecting ceiling in accordance with BS 476 Part 21 and Part 23. They can also be used to create a 30 minutes fire protecting membrane ceiling (integrity only) in accordance with BS 476 Part 22.



Light reflection

86%



Humidity and sag resistance

Up to 100% RH.

No visible deflection in high humidity
C/0N



Cleaning

- Vacuum



Hygiene

Stone wool provides no sustenance to microorganisms



Environment

Recyclable



Indoor environment

A selection of Rockfon products have been awarded the Finnish M1 emission classification for building materials and the Danish Indoor Climate Label for low emission products

